

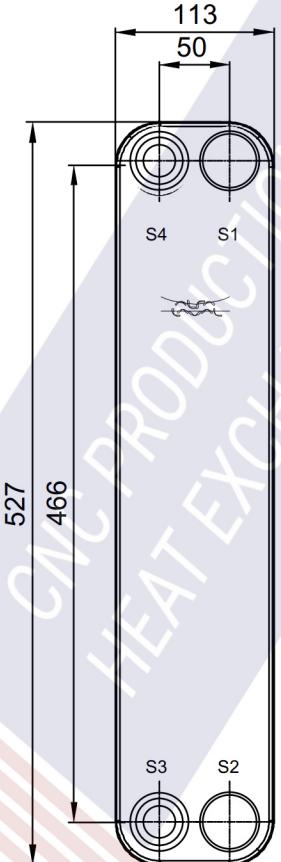
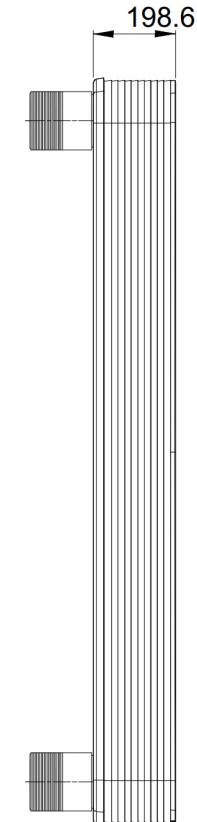


Note that all unique customer requirements (i.e tolerance) need to be verified thru Alfa Laval.

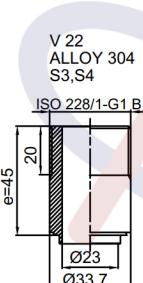

Frameplate is depressed 2.1 mm.
at connections S3 and S4 if holed.
Pressureplate is depressed 2.1 mm
at connections T3 and T4 if holed.

T1 T2 T3 T4 locations on back side
correspond to S1 S2 S3 S4 on front side

ALL DIMENSIONS IN MILLIMETERS

HEATING SURFACE m²
NETWEIGHT 16.8 kg
OPERATING WEIGHT kg
PLATE MATERIAL ALLOY 316
PLATE GROUPING 1*39L/1*40L

SIDE	MEDIA	INLET TEMP.	OUTLET TEMP.	FLOW RATE	PRESSURE DROP	LIQUID VOL.
1	Water	S1 °C	S2 °C	kg/h	kPa	4.1 dm ³
2	Water	S3 °C	S4 °C	kg/h	kPa	4.0 dm ³

PRESSURE VESSEL APPROVAL
CB60-80L(3287101491)

PED

www.alfalaval.com

CUSTOMER NAME / REF. NO.

TOTAL LENGTH
TOTAL WIDTH
TOTAL HEIGHT

244 mm
113 mm
527 mm

COMPANY / REF.
Aptec production s.r.o.

7/8/2020
REV 0