


Note that all unique customer requirements (i.e tolerance) need to be verified thru Alfa Laval.

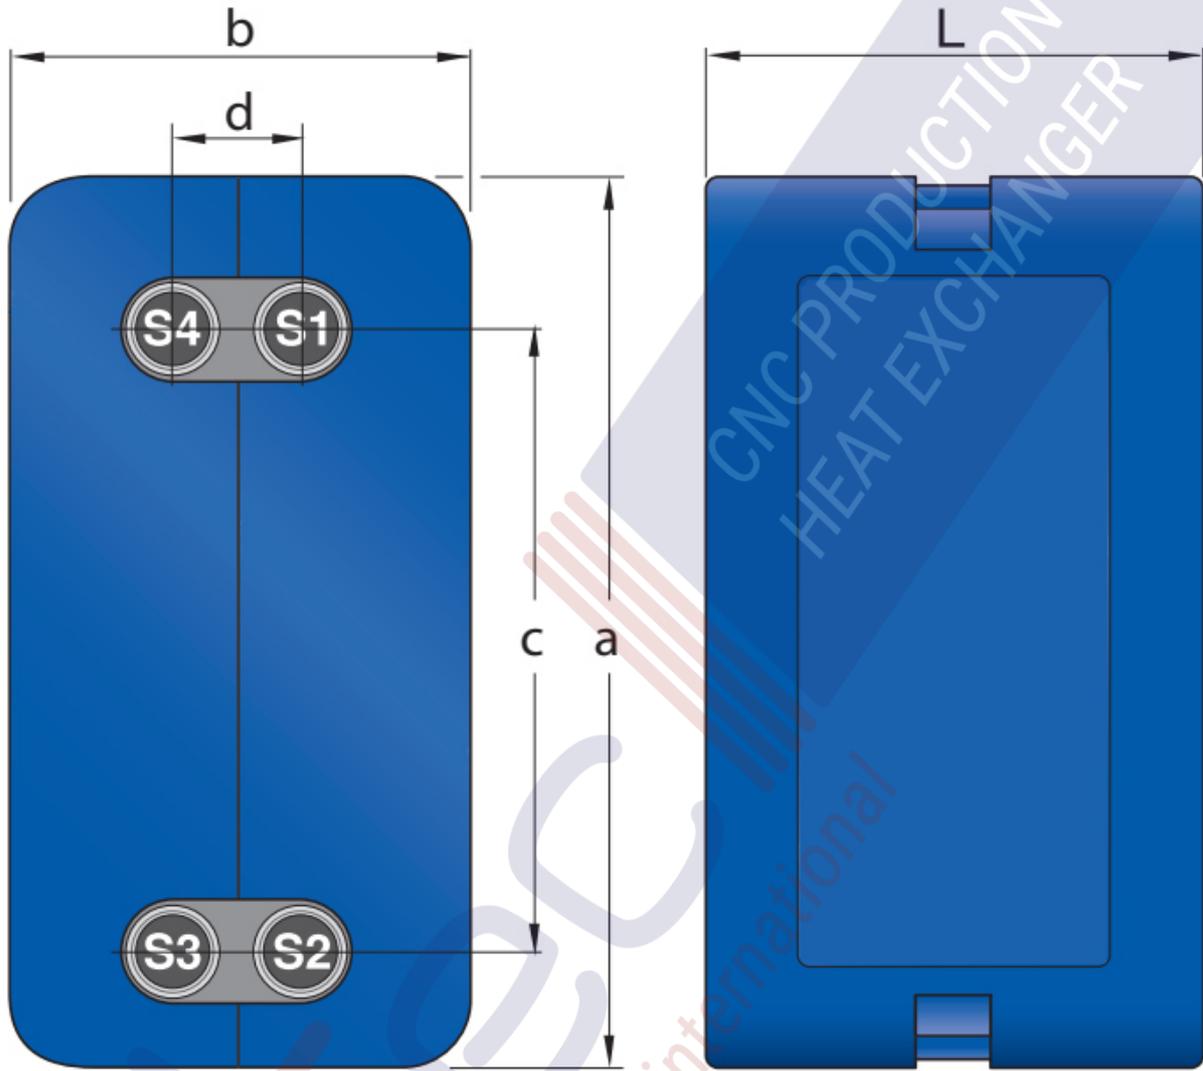

IN-H max 130°C -Type A

- Blue plastic cover with CFC-free polyurethane foam
- Thickness 30-50 mm depending on model
- Thermal conductivity: 0.031 w/mK
- Max. temperature: 130°C
- Fire class rating E acc. to EN ISO 11925-2 : 2010

| | |
|-------------------------------|---------|
| D = HORIZONTAL SPACING | 50 mm |
| C = VERTICAL SPACING | 250 mm |
| L = TOTAL LENGTH | 160 mm |
| B = TOTAL WIDTH | 182 mm |
| A = TOTAL HEIGHT | 360 mm |
| NETWEIGHT | 0.80 kg |



3236000882

www.alfalaval.com

CUSTOMER NAME / REF. NO.

COMPANY / REF.

Aptec production s.r.o.
Aptec production s.r.o. 64010



12/22/2021
REV 0