


Note that all unique customer requirements (i.e tolerance) need to be verified thru Alfa Laval.

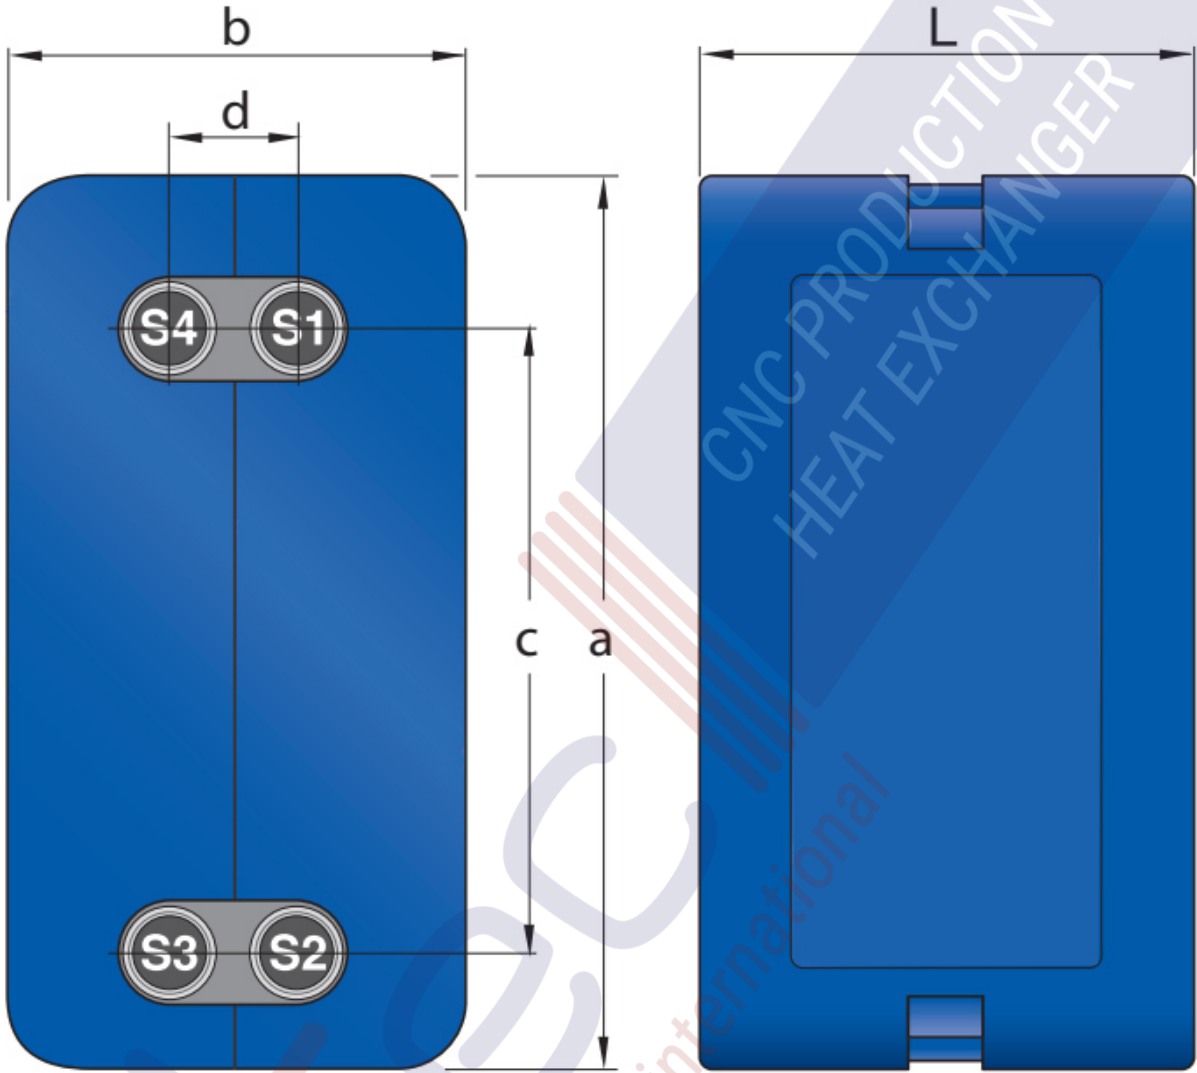

IN-H max 130°C -Type A

- Blue plastic cover with CFC-free polyurethane foam
- Thickness 30-50 mm depending on model
- Thermal conductivity: 0.031 w/mK
- Max. temperature: 130°C
- Fire class rating E acc. to EN ISO 11925-2 : 2010

D = HORIZONTAL SPACING	92 mm
C = VERTICAL SPACING	520 mm
L = TOTAL LENGTH	421 mm
B = TOTAL WIDTH	240 mm
A = TOTAL HEIGHT	670 mm
NETWEIGHT	2.64 kg



3236000904

www.alfalaval.com

CUSTOMER NAME / REF. NO.

COMPANY / REF.

Aptec production s.r.o.
Aptec production s.r.o. 64010



12/22/2021
REV 0